


SWAY BRACE PIPE ATTACHMENT-K04

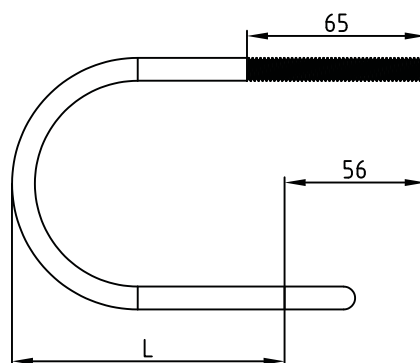

- **Function:** Support pipe to prevent sway or seismic disturbance. Provides a simple lateral connection that connects the support pipe members together as a complete assembly.
- **Material:** Carbon steel
- **Finish:** Electro-galvanized
- **Approvals:** Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), for use with standard steel pipe sizes 1" to 8".
- **Maximum Temperature:** 343° C (650° F)
- **Ordering:** Specify Size.

Item	Fig.No	Size	L	Support pipe	Assembly longitudinal and transverse loads					
			mm		Minimum load (lbs)	Minimum load (Kg)	Minimum load (N)	Maximum load (lbs)	Maximum load (Kg)	Maximum load (N)
GSUS	UTT13	1"	51	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	1-1/4"	59	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	1-1/2"	65	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	2"	77.5	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	2-1/2"	93.5	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	3"	105.5	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	4"	130.5	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	5"	156	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	6"	185	1"SCH40 pipe	680	306	3020	1496	673	6650
GSUS	UTT13	8"	237	1"SCH40 pipe	680	306	3020	1496	673	6650