


CLAMPING PIPE ATTACHMENT-K04

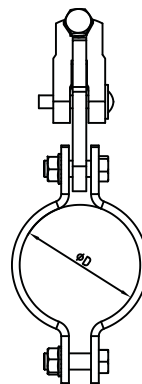

- **Function:** Used for fast fixing main pipe, used for single pipe transverse or longitudinal seismic, suitable for pipe arbitrary Angle connection, fixed connection slot parts can be cast.
- **Material:** Carbon steel
- **Finish:** Electro-galvanized
- **Approvals:** Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), for use with standard steel pipe sizes 2" to 8".
- **Maximum Temperature:** 343° C (650° F)
- **Ordering:** Specify Size.

Item	Fig.No	Size	D	Support Pipe	Assembly longitudinal and transverse loads					
			mm		Minimum load (lbs)	Minimum load (Kg)	Minimum load (N)	Maximum load (lbs)	Maximum load (Kg)	Maximum load (N)
GJZC	UTT20	2"	61	1"SCH40 pipe	680	306	3020	1496	673	6650
GJZC	UTT20	2-1/2"	76	1"SCH40 pipe	680	306	3020	1496	673	6650
GJZC	UTT20	3"	90	1"SCH40 pipe	680	306	3020	1496	673	6650
GJZC	UTT20	4"	115	1"SCH40 pipe	680	306	3020	1496	673	6650
GJZC	UTT20	5"	141	1"SCH40 pipe	1370	617	6090	3014	1356	13400
GJZC	UTT20	6"	168	1"SCH40 pipe	1370	617	6090	3014	1356	13400
GJZC	UTT20	8"	220	1"SCH40 pipe	1370	617	6090	3014	1356	13400